


American HVAC Flow Diverter Centrifugal Pump Accessories

Features:

- 90° Elbow/Strainer Combination
- 304SS Strainer
- 20 Mesh Start up Strainer
- Integral Straightening Vanes
- Ductile Iron Body
- Stainless Bolting
- Pump Protection
- Space Savings

Operating Data:


- Class 125/150
- Maximum Pressure 275 PSI
- 240 Degree Max Temperature

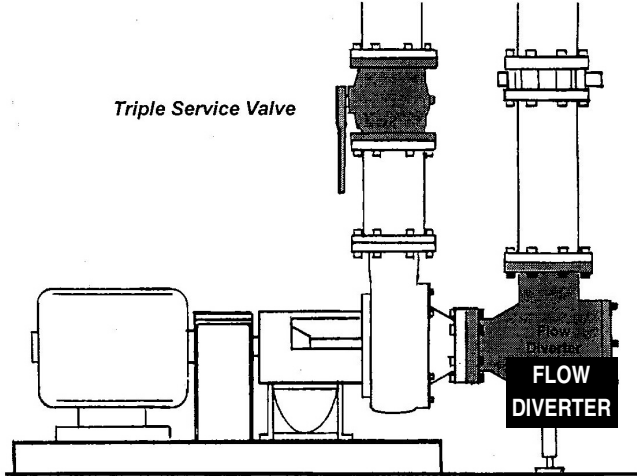

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

Materials of Construction

Description	Material	Description	Material
Body	ASTM A536 Ductile Iron/Class 125/150	Start up Screen	20 Mesh 304 Stainless Steel
ORing	Nitrile O'Ring	Bolting	ASTM 304 Stainless Steel
Cover	ASTM A536 Ductile Iron	Nuts	ASTM 304 Stainless Steel
Screen	3/16" Perforated 304 Stainless Steel	Pipe Plugs	ASTM A536 Ductile Iron

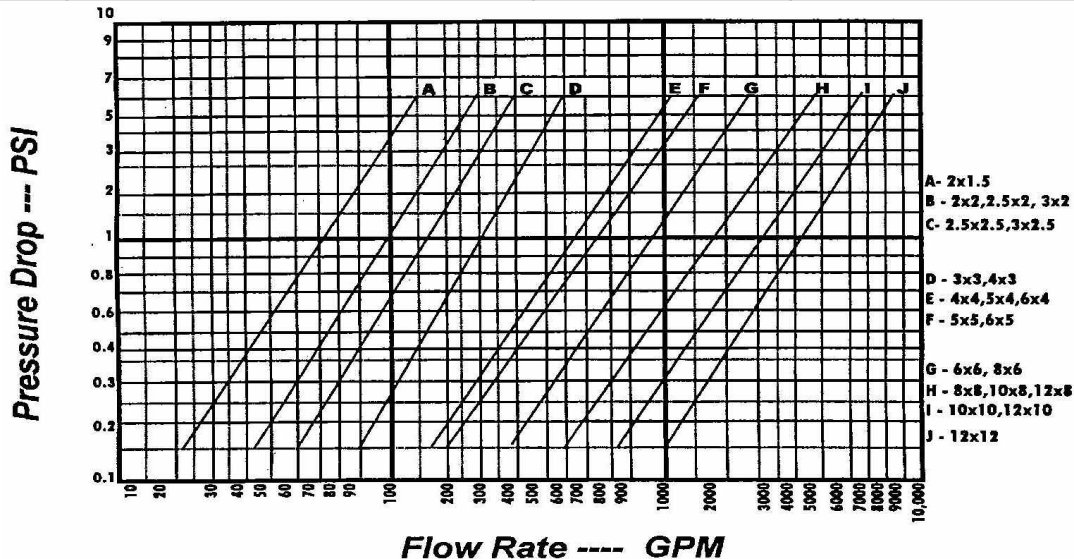

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____



1005 E. Houston
 Broken Arrow, OK 74012
 Toll Free: 866-204-5229
 PH: 918-317-0401
 FAX: 918-317-0407
 www.wheatleyhvac.com
 e-mail: sales@globalflowproducts.com