


# Bottom Feed Expansion Tanks

## ASME Bottom Feed Expansion Tanks

- Carbon Steel Construction
- ASME Stamped & Certificates Available
- Heavy Duty Butyl Bladder
- Bladder is NSF Approved, must have optional trim for potable water use
- Standard Design Pressure 125 PSI
- 150, 175, 200, 250 PSI and higher pressures available
- Maximum Design Temperature 240 Degrees
- 12 PSI Precharge is standard on Shipping
- Calif Bulls Eye Sight Glass Available
- Seismic Mounting Clips Available
- Epoxy Coatings Available
- EPDM Bladders Available

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

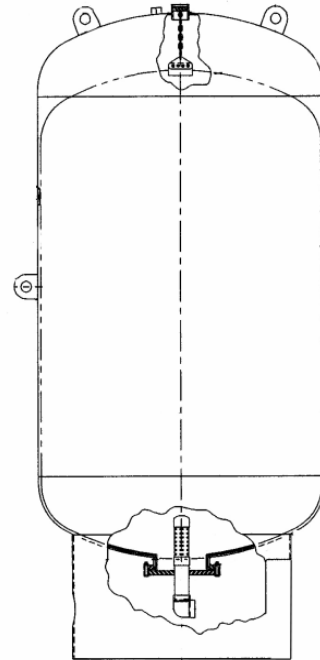

Model	Size Gallons	Diameter	Tank Length	Skirt Height	Total Height	System Connection	Approx Weight
WBF140	36	20"	30"	10"	42"	2"	220
WBF215	57	20"	46"	10"	58"	2"	315
WBF300	82	24"	47"	12"	61"	2"	350
WBF450	120	24"	67"	12"	81"	2"	425
WBF600	165	30"	59"	12"	73"	2"	485
WBF800	220	30"	77"	12"	91"	2"	615
WBF1000	271	36"	67"	12 5/8"	81 5/8"	3"	815
WBF1200	324	36"	79"	12 5/8"	81 5/8"	3"	965
WBF1400	377	36"	91"	12 5/8"	105 5/8"	3"	1045
WBF1600	440	48"	64"	14"	80"	3"	1405
WBF2000	550	48"	78"	14"	94"	3"	1675

JOB NAME _____
LOCATION _____
_____
CONTRACTOR _____
CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____