
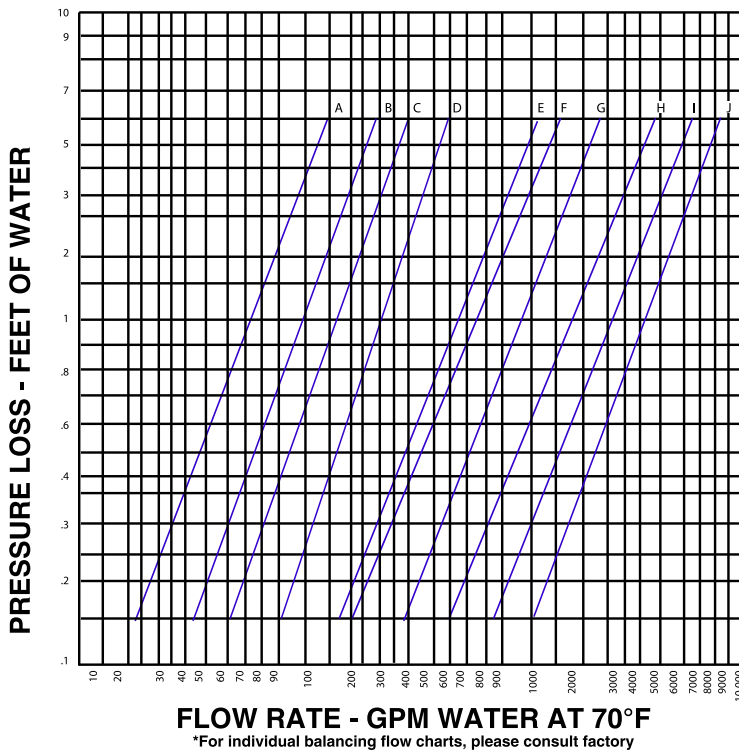


American HVAC Flow Diverter

Centrifugal Pump Accessories

Features:

- 90° Elbow/Strainer Combination
- 304 Stainless Steel Strainer
- 20 Mesh Start up Strainer
- Integral Straightening Vanes
- Ductile Iron Body
- Stainless Bolting
- Pump Protection
- Space Savings
- Class 125/150 maximum pressure 275 PSI
- 240° F maximum working temperature
- Painted Exterior

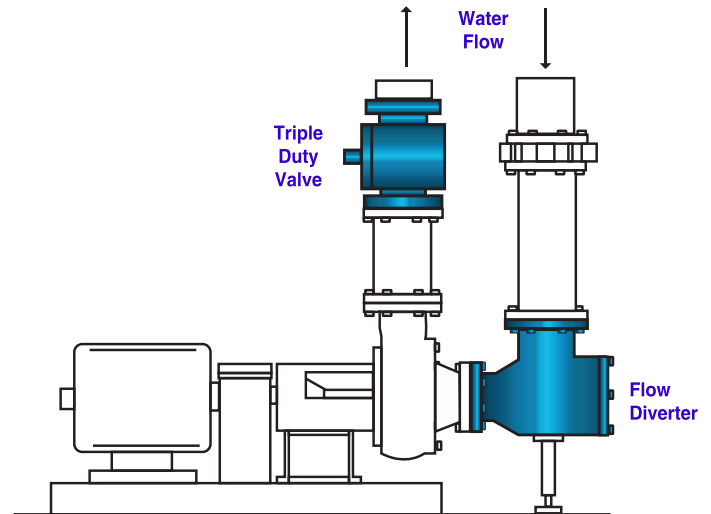

Bill of Materials

DESCRIPTION	MATERIAL
Body	ASTM A536 Ductile Iron/Class 125/150
O'Ring	Nitrile O'Ring
Cover	ASTM A536 Ductile Iron
Screen	3/16" Perforated 304 Stainless Steel
Start up Screen	20 Mesh 304 Stainless Steel
Bolting	ASTM 304 Stainless Steel
Nuts	ASTM 304 Stainless Steel
Pipe Plugs	ASTM A536 Ductile Iron

- A- 2X1.5
- B- 2X2, 2.5X2, 3X2
- C- 2.5X2.5, 3X2.5
- D- 3X3, 4X3
- E- 4X4, 5X4, 6X4
- F- 5X5, 6X5
- G- 6X6, 8X6
- H- 8X8, 10X8, 12X8
- I- 10X10, 12X10
- J- 12X12

All packaging materials, thread protectors, plastic plugs and caps must be removed before installation.

Dimensions are subject to change without notice, please confirm actual dimensions with factory at time of order.

JOB NAME _____
 LOCATION _____

 CONTRACTOR _____
 CONTRACTOR P.O. NO. _____

ITEMS	QUANTITY
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____



2701 W. Concord Street
 Broken Arrow, OK 74012
 Toll Free: 866-204-5229
 PH: 918-317-0401
 FAX: 918-317-0407
 www.wheatleyhvac.com
 e-mail: sales@globalflowproducts.com